



# SPLIT

Colours | Farben | Couleurs

# XV

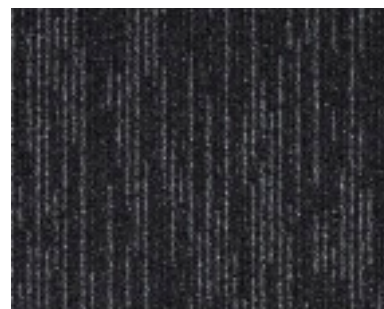

Split 162

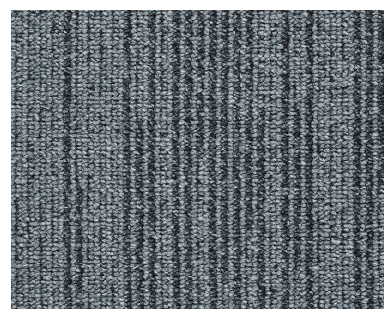


Split 116



Split 932



Split 964

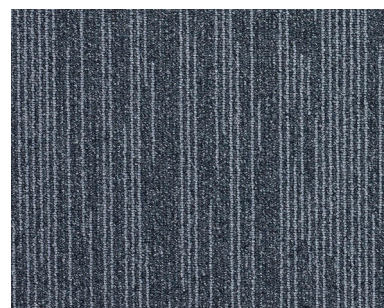


Split 157



Split 989



Split 966

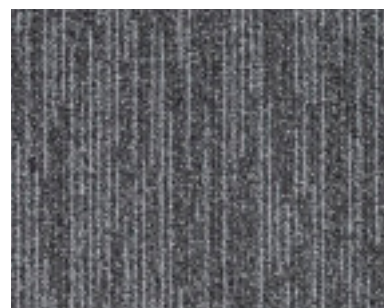

Split 166

## CARUS®

BIG Floorcoverings nv  
Rijksweg 442  
B-8710 Wielsbeke - Belgium

Showroom  
Boffonstraat 3  
B-8710 Wielsbeke - Belgium

[www.carusflooring.com](http://www.carusflooring.com)  
[carus@bintg.com](mailto:carus@bintg.com)  
T +32 (0)56 67 42 11 - F +32 (0)56 67 48 30

## XV

XV

|                                                                                                   |             |                         |
|---------------------------------------------------------------------------------------------------|-------------|-------------------------|
| Total weight<br>Gesamtgewicht<br>Poids total                                                      | ISO 8543    | 1750 g/m <sup>2</sup>   |
| Number of tufts<br>Noppenzahl<br>Nombre de points                                                 | ISO 1763    | 96 200/m <sup>2</sup>   |
| Fastness to rubbing (dry)<br>Reibechtheit (trocken)<br>Solidité au frottement (sec)               | ISO 105 X12 | ≥ 3 - 4                 |
| Fastness to rubbing (wet)<br>Reibechtheit (nass)<br>Solidité au frottement (humide)               | ISO 105 X12 | ≥ 3                     |
| Water fastness<br>Wasserechtheit<br>Solidité à l'eau                                              | ISO 105 E01 | ≥ 4                     |
| Fastness to light<br>Lichtechtheit<br>Solidité à la lumière                                       | ISO 105 B2  | ≥ 5                     |
| Thermal resistance<br>Wärmedurchlasswiderstand<br>Résistance thermique                            | ISO 8302    | 0,12 m <sup>2</sup> K/W |
| Impact sound insulation<br>Trittschalldämmung<br>Réduction de la transmission<br>du bruit de choc | ISO 140 - 8 | 25 dB                   |



www.carusflooring.com  
carus@bintg.com  
T +32 (0)56 67 42 11 – F +32 (0)56 67 48 30