

Sensit Glenmore Wilton

Cumulus 2302



Misty Grey 915



▲ Magnolia 620



▲ Berber Beige 680




▲ Walnut 720



▲ Misty Grey 915




▲ Field Stone 945

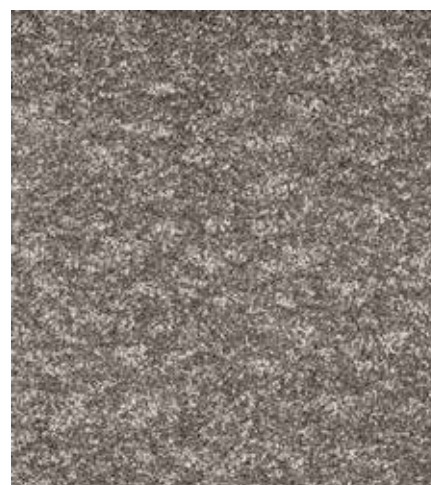

▲ Smoky Black 955

Manufacturing process	Woven face-to-face Wilton	Number of points	ca. 239.200/m²
Pile content	100% PP Sensit®	Width	400 cm
Pile weight	ca. 2.710 gr/m²	Design Repeat	100 (W) x 100 (H) cm
Total weight	ca. 3.200 gr/m²	Light Fastness	5-6
Pile height	ca. 17 mm	Water resistance	4-5
Total height	ca. 19 mm	Characteristics	Heavy Domestic / Medium contract use
Shot density	52/10 cm	Thermal resistance	0,16 m² K/W (Tog 1,6)
Warp rate	23/10 cm	Installation	Underlay and gripper rods BS5325

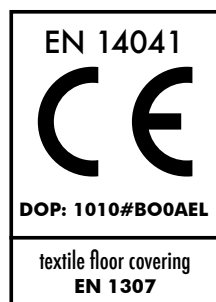

SENSIT®
SPARKLING • SOFT • STRONG



Onder voorbehoud van wijzigingen van de technische specificaties - Sous réserve de modifications techniques - Unter Vorbehalt von Änderungen der technischen Daten - All rights reserved to alter technical specifications. Kijk voor de uitgebreide garantiev voorwaarden op www.stain-safe.com - Pour le détail des conditions de garantie, rendez-vous sur www.stain-safe.com - Detaillierte Garantiebedingungen finden Sie auf www.stain-safe.com - For detailed warranty conditions, see www.stain-safe.com

Balta Broadloom
Wakkensteenweg 2, 8710 Sint-Baafs-Vijve • Belgium
T +32 (0)56 62 22 11 • F +32 (0)56 62 23 55 • broadloom@baltagroup.com • www.baltagroup.com